




NTN DRIVESHAFT ANDERSON, INC.

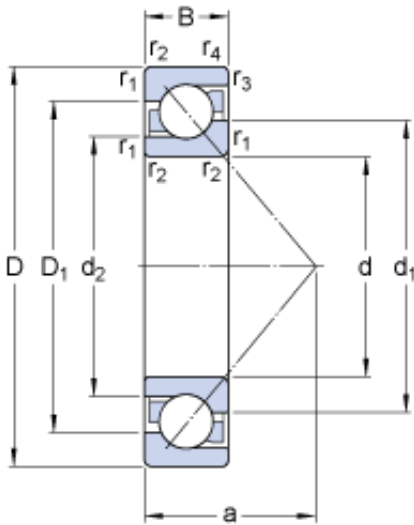

85 mm x 180 mm x 41 mm SKF 7317 BEGAF
angular contact ball bearings

Bearing No. 7317 BEGAF

7317 BEGAF Bearing 2D drawings and 3D CAD models

Size	180x85x41 mm
Bore Diameter	180 mm
Outer Diameter	85 mm
Width	41 mm
d	85 mm
D	180 mm
B	41 mm
d ₁	122.3 mm
d ₂	103.03 mm
D ₁	144.95 mm
a	76 mm
r _{1,2} - min.	3 mm
r _{3,4} - min.	1.1 mm
d _a - min.	99 mm
D _a - max.	166 mm
D _b - max.	173 mm
r _a - max.	2.5 mm
r _b - max.	1 mm
Basic dynamic load rating - C	146 kN
Basic static load rating - C ₀	122 kN
Fatigue load limit - P _u	4.5 kN
Reference speed	4300 r/min
Limiting speed	4300 r/min
Calculation factor - k _r	0.1



NTN DRIVESHAFT ANDERSON, INC.

Calculation factor - k_a	1.6
Calculation factor - e	1.14
Calculation factor - X	0.57
Calculation factor - Y_0	0.52
Calculation factor - Y_1	0.55
Calculation factor - Y_2	0.93
Calculation factor - X	0.35
Calculation factor - Y_0	0.26
Calculation factor - Y_1	
Calculation factor - Y_2	0.57
Category	Angular Contact Ball Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	4.76
EAN	7316577151094
Product Group	B00308
Enclosure	Open
Flush Ground	Yes
Rolling Element	Ball Bearing
Number of Rows of Balls	Single Row
Precision Class	ABEC 3 ISO P6
Maximum Capacity / Filling Slot	No
Snap Ring	No
Cage Material	Steel
Contact Angle	40 Degree
Internal Clearance	C0-Medium
Number of Bearings	1 (Single)
Preload	Light
Mounting Arrangement	Universal



NTN DRIVESHAFT ANDERSON, INC.

Inch - Metric	Metric
Long Description	85MM Bore; 180MM Outside Diameter; 41MM Width; Open; Yes Flush Ground; Ball Bearing; Single Row of Balls; ABEC 3 ISO P6; No Filling Slot; No Snap Ring
Category	Angular Contact Ball Bearing
UNSPSC	31171531
Harmonized Tariff Code	8482.10.50.28
Noun	Bearing
Keyword String	Angular Contact
Manufacturer URL	http://www.skf.com
Manufacturer Item Number	7317 BEGAF
Weight / LBS	10.483
Bore	3.346 Inch 85 Millimeter
Width	1.614 Inch 41 Millimeter
Outside Diameter	7.087 Inch 180 Millimeter
bore diameter:	85 mm
radial static load capacity:	122 kN
outside diameter:	180 mm
outer ring width:	41 mm
overall width:	41 mm
maximum rpm:	4300 RPM
contact angle:	40 °
finish/coating:	Uncoated
row type & fill slot:	Single-Row Non-Fill Slot
precision rating:	Not Rated
internal clearance:	C0
fillet radius:	2.5 mm
closure type:	Open
series:	73



NTN DRIVESHAFT ANDERSON, INC.

radial dynamic load capacity:	146 kN
d_1	122.3 mm
d_2	103.03 mm
D_1	144.95 mm
$r_{1,2}$ min.	3 mm
$r_{3,4}$ min.	1.1 mm
d_a min.	99 mm
D_a max.	166 mm
D_b max.	173 mm
r_a max.	2.5 mm
r_b max.	1 mm
Basic dynamic load rating C	146 kN
Basic static load rating C_0	122 kN
Fatigue load limit P_u	4.5 kN
Calculation factor A	0.27
Calculation factor k_r	0.1
Calculation factor e	1.14
Calculation factor X	0.35
Calculation factor Y_0	0.26
Calculation factor Y_2	0.57
Calculation factor X	0.57
Calculation factor Y_0	0.52
Calculation factor Y_1	0.55
Calculation factor Y_2	0.93
Mass bearing	4.45 kg