




# NTN DRIVESHAFT ANDERSON, INC.

## INA TASE45 bearing units

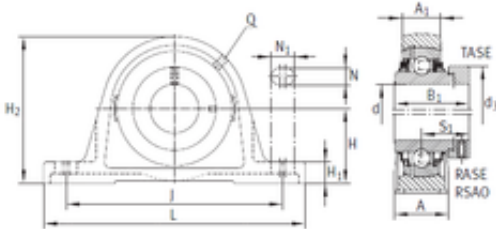

TASE45 Bearing 2D drawings and 3D CAD models

Bearing No. TASE45

Bore Diameter	45 mm
d	45 mm
S1	35,1 mm
Thread (Q)	Rp1/8
d3	63 mm
A	48 mm
A1	32 mm
B1	56,5 mm
H	54 mm
H1	21,5 mm
H2	107 mm
J	150 mm
L	192 mm
N	14 mm
N1	29 mm
Weight	2,28 Kg
Basic dynamic load rating (C)	32,5 kN
Category	Pillow Block Bearings
Inventory	0.0
Manufacturer Name	SCHAEFFLER GROUP
Minimum Buy Quantity	N/A
Weight / Kilogram	2.706
EAN	4012802799156
Product Group	M06110
Number of Mounting Holes	2
Mounting Method	Eccentric Collar



## NTN DRIVESHAFT ANDERSON, INC.

Housing Style	2 Bolt Pillow Block
Rolling Element	Ball Bearing
Housing Material	Cast Iron
Expansion / Non-expansion	Non-expansion
Relubricatable	Yes
Insert Part Number	GE45KPPB3
Seals	Double Triply
Housing Configuration	1 Piece Solid
Inch - Metric	Metric
Other Features	Single Row   Standard Shaft Height   With Set Screw
Long Description	2 Bolt Pillow Block; 45MM Bore; 54MM Base to Center Height; Eccentric Collar Mount; Ball Bearing; 136.5MM Minimum Bolt Spacing; 160.5MM Bolt Spacing Maximum; Relubricatable; Cast Iron; Double Triply;
Category	Pillow Block
UNSPSC	31171511
Harmonized Tariff Code	8483.20.40.40
Noun	Bearing
Keyword String	Pillow Block
Manufacturer URL	<a href="http://www.ina.com">http://www.ina.com</a>
Manufacturer Item Number	TASE45
Weight / LBS	5.292
Actual Bolt Center to Center	0 Inch   0Millimeter
Bore	1.772 Inch   45 Millimeter
Bolt Spacing Minimum	5.374 Inch   136.5Millimeter
Base to Center Height	2.126 Inch   54 Millimeter
Length Thru Bore	2.217 Inch   56.3 Millimeter
Nominal Bolt Center to	5.8 Inch   146.5 Millimeter



## NTN DRIVESHAFT ANDERSON, INC.

Center	
Bolt Spacing Maximum	6.319 Inch   160.5Millimeter