




NTN DRIVESHAFT ANDERSON, INC.

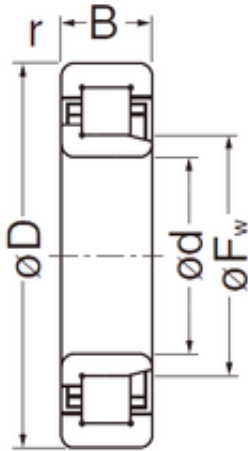

40 mm x 80 mm x 23 mm NACHI NJ2208EG cylindrical roller bearings

Bearing No. NJ2208EG

NJ2208EG Bearing 2D drawings and 3D CAD models

Size	40x80x23 mm
Bore Diameter	40 mm
Outer Diameter	80 mm
Width	23 mm
d	40 mm
Fw	49,5 mm
D	80 mm
B	23 mm
C	23 mm
r min.	1,1 mm
r1 min.	1,1 mm
Weight	0,743 Kg
Basic dynamic load rating (C)	72,5 kN
Basic static load rating (C0)	77,5 kN
(Grease) Lubrication Speed	7500 r/min
Enclosure	Open
Configuration	Single Row
Bore Type	Cylindrical Bore
Bore Size	40 mm
Outside Diameter	80 mm
Width	23 mm
Inside Ring Outside Diameter	49.5 mm
Fillet Radius/Chamfer	1.1 mm
r1	1.1 mm



NTN DRIVESHAFT ANDERSON, INC.

Dynamic Load Rating	72,500 N
Static Load Rating	77,500 N
Limiting Speed - Grease	7,500 rpm
Limiting Speed - Oil	9,000 rpm
Radial Clearance	0.025 to 0.050 mm
db (min)	47 mm
db (max)	49 mm
dc (min)	52 mm
dd (min)	56 mm
Da (max)	73 mm
ra (max)	1 mm
ra1 (max)	1 mm