




# NTN DRIVESHAFT ANDERSON, INC.

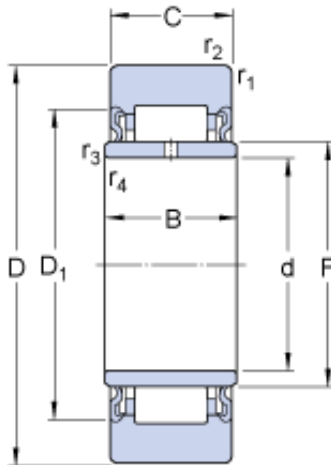

12 mm x 32 mm x 14 mm SKF NA 2201.2RSX cylindrical roller bearings

Bearing No. NA 2201.2RSX

NA 2201.2RSX Bearing 2D drawings and 3D CAD models

Size	12x32x13.8 mm
Bore Diameter	12 mm
Outer Diameter	32 mm
Width	13,8 mm
D	32 mm
d	12 mm
C	13.8 mm
B	14 mm
D <sub>1</sub>	22 mm
F	16 mm
r <sub>1,2</sub> - min.	0.6 mm
r <sub>3,4</sub> - min.	0.3 mm
Basic dynamic load rating - C	7 kN
Basic static load rating - C <sub>0</sub>	8.5 kN
Fatigue load limit - P <sub>u</sub>	1 kN
Maximum dynamic radial loads - F <sub>r</sub>	11.6 kN
Maximum static radial loads - F <sub>0r</sub>	16.6 kN
Limiting speed	6000 r/min
Category	Cam Follower and Track Roller - Yoke Type
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A



## NTN DRIVESHAFT ANDERSON, INC.

Weight / Kilogram	0.07
EAN	7316577726667
Product Group	B04144
Roller Surface Profile	Flat
Profile	Yoke Type
Enclosure	Sealed
Rolling Element	Needle Bearing
Relubricatable	Yes
Inch - Metric	Metric
Other Features	Caged   With Inner Ring   Lip Seal
Long Description	12MM Bore; 32MM Roller Diameter; 13.8MM Roller Width; Flat Roller; Yoke Type; Sealed; Needle Bearing; Relubricatable
Category	Cam Followers Yoke Type
UNSPSC	31171530
Harmonized Tariff Code	8482.40.00.00
Noun	Bearing
Keyword String	Cam Follower
Manufacturer URL	<a href="http://www.skf.com">http://www.skf.com</a>
Manufacturer Item Number	NA 2201.2RSX
Weight / LBS	0.148
Bore	0.472 Inch   12 Millimeter
Roller Diameter	1.26 Inch   32 Millimeter
Roller Width	0.543 Inch   13.8 Millimeter
D <sub>1</sub>	22 mm
r <sub>1,2</sub> min.	0.6 mm
r <sub>3,4</sub> min.	0.3 mm
Basic dynamic load rating C	7.04 kN
Basic static load rating C <sub>0</sub>	8.5 kN
Fatigue load limit P <sub>u</sub>	1 kN
Maximum dynamic radial	11.6 kN



## NTN DRIVESHAFT ANDERSON, INC.

load $F_r$ max.	
Maximum static radial load $F_{0r}$ max.	16.6 kN
Mass support roller	0.067 kg