




NTN DRIVESHAFT ANDERSON, INC.

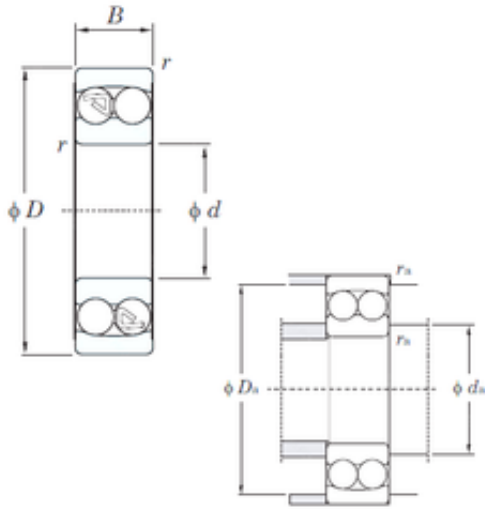

60 mm x 110 mm x 28 mm KOYO 2212 self aligning ball bearings

Bearing No. 2212

2212 Bearing 2D drawings and 3D CAD models

| | |
|-------------------------------|--------------|
| Size | 60x110x28 mm |
| Bore Diameter | 60 mm |
| Outer Diameter | 110 mm |
| Width | 28 mm |
| d | 60 mm |
| D | 110 mm |
| B | 28 mm |
| C | 28 mm |
| r min. | 1.5 mm |
| da min. | 68 mm |
| Da max. | 102 mm |
| ra max. | 1.5 mm |
| Weight | 1.09 Kg |
| Basic dynamic load rating (C) | 34.1 kN |
| Basic static load rating (C0) | 12.6 kN |
| (Grease) Lubrication Speed | 5300 r/min |
| (Oil) Lubrication Speed | 6500 r/min |
| Calculation factor (e) | 0.28 |
| Calculation factor (Y0) | 2.36 |
| Calculation factor (Y1) | 2.26 |
| Category | Bearings |
| Inventory | 0.0 |
| Manufacturer Name | KOYO |
| Minimum Buy Quantity | N/A |
| Weight / Kilogram | 1.1 |



NTN DRIVESHAFT ANDERSON, INC.

| | |
|-------------------|--------|
| Product Group | B00152 |
| Bearing No. | 2212 |
| r(min) | 1.5 |
| Cr | 34.1 |
| C0r | 12.5 |
| Cu | 0.80 |
| Grease lub. | 5300 |
| Oil lub. | 6500 |
| da(min) | 68 |
| Da(max) | 102 |
| ra(max) | 1.5 |
| e | 0.28 |
| Y1 | 2.26 |
| Y2 | 3.49 |
| Y0 | 2.36 |
| (Refer.) Mass(kg) | 1.09 |