




NTN DRIVESHAFT ANDERSON, INC.

88,9 mm x 168,275 mm x 41,275 mm KOYO
679/672 tapered roller bearings

Bearing No. 679/672

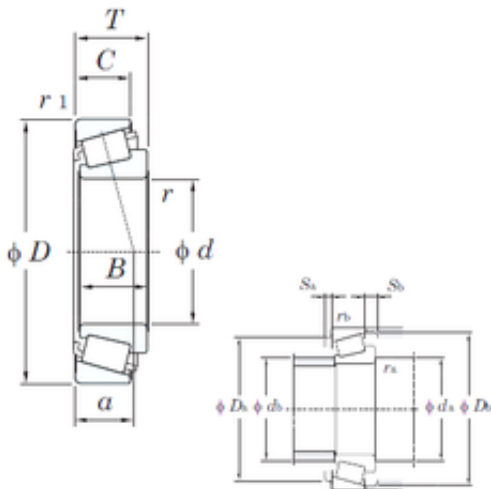

679/672 Bearing 2D drawings and 3D CAD models

Size	88.9x168.275x41.275 mm
Bore Diameter	88,9 mm
Outer Diameter	168,275 mm
Width	41,275 mm
d	88,9 mm
D	168,275 mm
T	41,275 mm
B	41,275 mm
C	30,162 mm
a	38,6 mm
r min.	3,6 mm
r2 min.	3,2 mm
da min.	107 mm
Da	149 mm
db min	101 mm
ra max.	3,6 mm
rb max.	3,2 mm
Db	160 mm
Weight	3,97 Kg
Basic dynamic load rating (C)	224 kN
Basic static load rating (C0)	349 kN
(Grease) Lubrication Speed	2200 r/min
(Oil) Lubrication Speed	3000 r/min
Calculation factor (e)	0,47
Calculation factor (Y0)	0,7



NTN DRIVESHAFT ANDERSON, INC.

Bearing No.	679/672
r(min)	3.6
r1(min)	3.2
Cr	282
C0r	349
Cu	50.4
Grease lub.	2200
Oil lub.	3000
a	38.6 mm
da	107.0
db	101.0
ra(max)	3.6
rb(max)	3.2
e	0.47
Y1	1.28
Y0	0.70
(Refer.)Mass(kg)	3.98