




NTN DRIVESHAFT ANDERSON, INC.

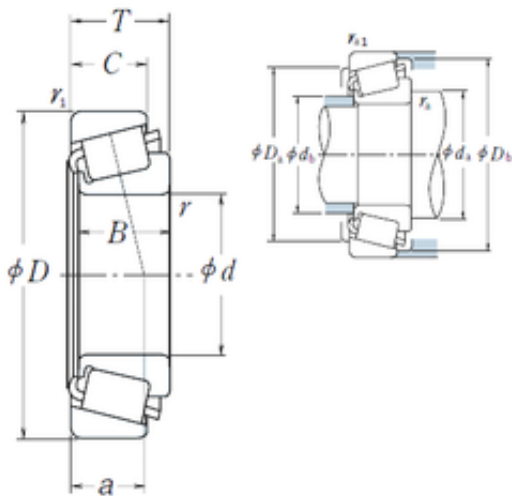

47,625 mm x 88,9 mm x 22,225 mm NSK
369A/362A tapered roller bearings

Bearing No. 369A/362A

369A/362A Bearing 2D drawings and 3D CAD models

Size	47.625x88.9x20.638 mm
Bore Diameter	47,625 mm
Outer Diameter	88,9 mm
Width	20,638 mm
d	47,625 mm
D	88,9 mm
T	20,638 mm
B	22,225 mm
C	16,513 mm
ra1 max.	1,3 mm
a	16,6 mm
r min.	3,5 mm
r1 min.	1,3 mm
Da	81 mm
db	53 mm
ra max.	3,5 mm
da	60 mm
Db	84 mm
Weight	0,547 Kg
Basic dynamic load rating (C)	73 kN
Basic static load rating (C0)	85 kN
(Grease) Lubrication Speed	4000 r/min
(Oil) Lubrication Speed	5600 r/min
Calculation factor (e)	0,32
Calculation factor (Y0)	1



NTN DRIVESHAFT ANDERSON, INC.

LangID	1
ALP23	0
outer r	1.3
ALP22	4
D_	88.9
ALP21	24
SHOG_yobi	369AR/362AR
RAr	196.722
inner r	3.5
GRS rpm	4000
D_b	84
D_a	81
DE_	79.078
SLR	14.2
Prod_Type3	TRBSR_ID_A
BETA_	1
ALPHA_	12.033
SDM_	68.786
DA1	10.871
DA2	10.09
hidYobi	369A/362A
Y1	1.9
B_	22.225
Oil rpm	5600
hidTable	ecat_NSTPRI
Y0	1
inner ra	3.5
outer rb	1.3
C0	85
CUP	0.166
e	0.32
DA_	10.483



NTN DRIVESHAFT ANDERSON, INC.

BET21	3
BET22	10
BET23	0
Z_	17
C_	16.513
yobi	369A/362A
KBRG	3161
CONE	0.381
DI_	58.43