




# NTN DRIVESHAFT ANDERSON, INC.

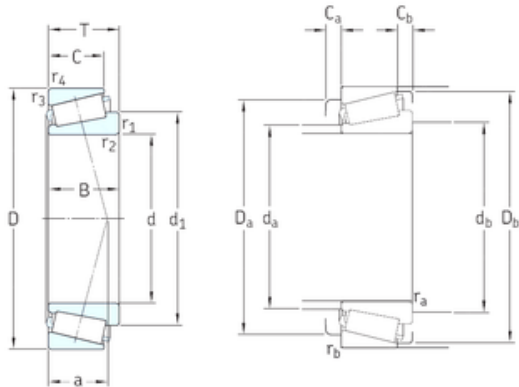

346,075 mm x 488,95 mm x 95,25 mm SKF  
HM262749/710 tapered roller bearings

Bearing No. HM262749/710

HM262749/710 Bearing 2D drawings and 3D CAD models

Size	346.075x488.95x95.25 mm
Bore Diameter	346,075 mm
Outer Diameter	488,95 mm
Width	95,25 mm
d	346,075 mm
D	488,95 mm
T	95,25 mm
B	95,25 mm
C	74,612 mm
a	88 mm
d1	413 mm
r1 min.	6,4 mm
r2 min.	6,4 mm
r3 min.	3,3 mm
r4 min.	3,3 mm
Ca min.	12 mm
Cb min.	21 mm
da max	379 mm
Da min	442 mm
Da max.	472 mm
db min	378 mm
Db min.	467 mm
ra max.	6 mm
rb max.	3,1 mm
Weight	55 Kg



## NTN DRIVESHAFT ANDERSON, INC.

Basic dynamic load rating (C)	1420 kN
Basic static load rating (C0)	3150 kN
Fatigue load limit (Pu)	255
Reference speed	850 r/min
Limiting speed	1300 r/min
Calculation factor (e)	0,33
Calculation factor (Y)	1,8