




NTN DRIVESHAFT ANDERSON, INC.

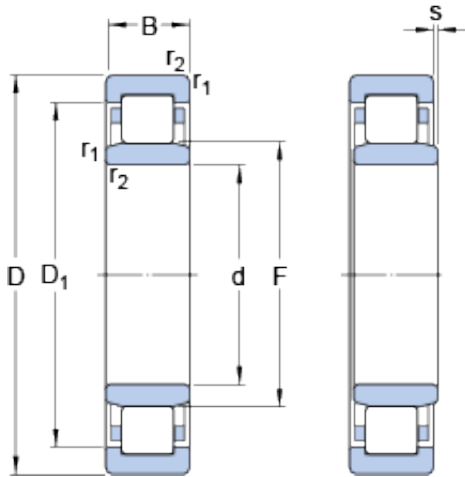

300 mm x 540 mm x 140 mm SKF NU 2260 MA thrust ball bearings

Bearing No. NU 2260 MA

NU 2260 MA Bearing 2D drawings and 3D CAD models

Size	540x300x140 mm
Bore Diameter	540 mm
Outer Diameter	300 mm
Width	140 mm
d	300 mm
D	540 mm
B	140 mm
D ₁	451 mm
F	364 mm
r _{1,2} - min.	5 mm
s	5.6 mm
d _a - min.	320 mm
d _a - max.	352 mm
d _b - min.	368 mm
D _a - max.	520 mm
r _a - max.	4 mm
Basic dynamic load rating - C	2090 kN
Basic static load rating - C ₀	3450 kN
Fatigue load limit - P _u	300 kN
Reference speed	1200 r/min
Limiting speed	1800 r/min
Calculation factor - k _r	0.2
Category	Cylindrical Roller Bearings
Inventory	0.0



NTN DRIVESHAFT ANDERSON, INC.

Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	161.6
Product Group	B04144
Bore Profile	Straight
Cage Material	Brass
Precision Class	RBEC 1 ISO P0
Number of Rows of Rollers	Single Row
Separable	Inner Ring - Both Sides
Rolling Element	Cylindrical Roller Bearing
Profile	Complete with Outer and Inner Ring
Snap Ring	No
Internal Clearance	C0-Medium
Retainer	Yes
Relubricatable	Yes
Inch - Metric	Metric
Other Features	Plain Inner Ring 2 Rib Outer Ring Cage on Outer Ring ID
Long Description	300MM Bore; Straight Bore Profile; 540MM Outside Diameter; 140MM Width; Brass Cage Material; RBEC 1 ISO P0; Single Row; Inner Ring - Both Sides Separable; No Snap Ring; Relubricatable; C0-Medium In
Category	Cylindrical Roller Bearing
UNSPSC	31171547
Harmonized Tariff Code	8482.50.00.00
Noun	Bearing
Manufacturer URL	http://www.skf.com
Manufacturer Item Number	NU 2260 MA
Weight / LBS	355.936



NTN DRIVESHAFT ANDERSON, INC.

Width	5.512 Inch 140 Millimeter
Outside Diameter	21.26 Inch 540 Millimeter
Bore	11.811 Inch 300 Millimeter
D_1	451 mm
$r_{1,2}$ min.	5 mm
s max.	5.6 mm
d_a min.	320 mm
d_a max.	352 mm
d_b min.	368 mm
D_a max.	520 mm
r_a max.	4 mm
Basic dynamic load rating C	2090 kN
Basic static load rating C_0	3450 kN
Fatigue load limit P_u	300 kN
Calculation factor k_r	0.2
Limiting value e	0.3
Axial load factor Y	0
Mass bearing	145 kg