




NTN DRIVESHAFT ANDERSON, INC.

260 mm x 440 mm x 180 mm SKF 24152 CCK30/W33 tapered roller bearings

Bearing No. 24152 CCK30/W33

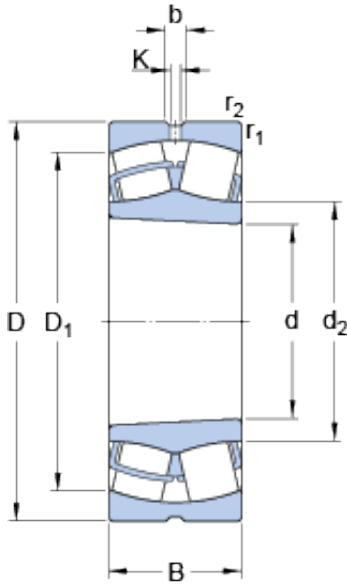

24152 CCK30/W33 Bearing 2D drawings and 3D CAD models

Size	440x260x180 mm
Bore Diameter	440 mm
Outer Diameter	260 mm
Width	180 mm
d	260 mm
D	440 mm
B	180 mm
d ₂	293 mm
D ₁	368 mm
b	13.9 mm
K	7.5 mm
r _{1,2} - min.	4 mm
d _a - min.	269 mm
D _a - max.	423 mm
r _a - max.	3 mm
Basic dynamic load rating - C	3086 kN
Basic static load rating - C ₀	4800 kN
Fatigue load limit - P _u	380 kN
Reference speed	670 r/min
Limiting speed	950 r/min
Calculation factor - e	0.4
Calculation factor - Y ₁	1.7
Calculation factor - Y ₂	2.5
Calculation factor - Y ₀	1.6



NTN DRIVESHAFT ANDERSON, INC.

Category	Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
UNSPSC	31171510
Weight / Kilogram	0
EAN	7316577039835
Product Group	B04311
d_2	293 mm
D_1	368 mm
$r_{1,2}$ min.	4 mm
D_a max.	423 mm
r_a max.	3 mm
Basic dynamic load rating C	3086 kN
Basic static load rating C_0	4800 kN
Fatigue load limit P_u	380 kN
Calculation factor e	0.4
Calculation factor Y_1	1.7
Calculation factor Y_2	2.5
Calculation factor Y_0	1.6
Mass bearing	110 kg