




NTN DRIVESHAFT ANDERSON, INC.

127 mm x 230 mm x 63,5 mm Timken
95500/95905 tapered roller bearings

Bearing No. 95500/95905

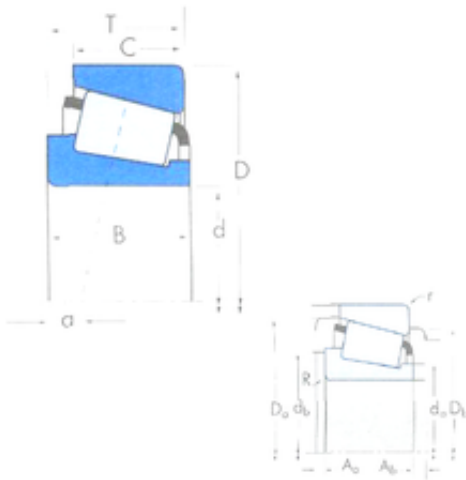

95500/95905 Bearing 2D drawings and 3D CAD models

| | |
|---------------------------------|-----------------|
| Size | 127x230x63.5 mm |
| Bore Diameter | 127 mm |
| Outer Diameter | 230 mm |
| Width | 63,5 mm |
| d | 127 mm |
| D | 230 mm |
| T | 63,5 mm |
| B | 63,5 mm |
| C | 49,212 mm |
| R | 6,3 mm |
| r | 3,3 mm |
| a - | 14 mm |
| Da | 217 mm |
| db | 154 mm |
| da | 142 mm |
| Db | 207 mm |
| Aa | 6,4 mm |
| Ab | 3,8 mm |
| Weight | 11 Kg |
| Basic static load rating (C0) | 931 kN |
| Factor (G1) | 453,9 |
| Factor (G2) | 59,4 |
| Factor (Cg) | 0,0378 |
| Factor (K) | 1,58 |
| Basic dynamic load rating (C90) | 151 |



NTN DRIVESHAFT ANDERSON, INC.

| | |
|-------------------------------------|--------|
| Basic dynamic load rating (Ca90) | 95,5 |
| Basic dynamic load rating (C1) | 582 kN |
| Calculation factor (e) | 0,37 |