




NTN DRIVESHAFT ANDERSON, INC.

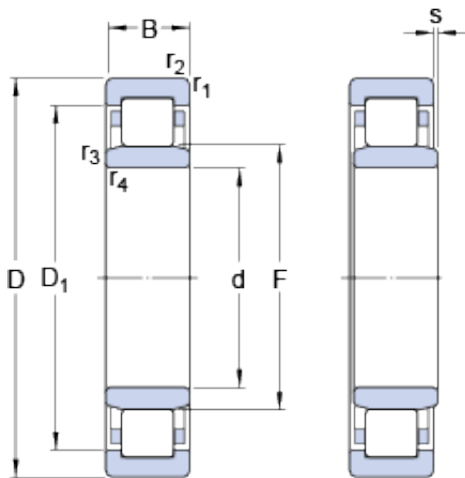

20 mm x 52 mm x 15 mm SKF NU 304 ECP thrust ball bearings

Bearing No. NU 304 ECP

NU 304 ECP Bearing 2D drawings and 3D CAD models

Size	52x20x15 mm
Bore Diameter	52 mm
Outer Diameter	20 mm
Width	15 mm
d	20 mm
D	52 mm
B	15 mm
D ₁	41.85 mm
F	27.5 mm
r _{1,2} - min.	1.1 mm
r _{3,4} - min.	0.6 mm
s	0.9 mm
d _a - min.	24.1 mm
d _a - max.	26.2 mm
d _b - min.	29 mm
D _a - max.	45.4 mm
r _a - max.	1 mm
r _b - max.	0.6 mm
Basic dynamic load rating - C	35.5 kN
Basic static load rating - C ₀	26 kN
Fatigue load limit - P _u	3.2 kN
Reference speed	15000 r/min
Limiting speed	18000 r/min
Calculation factor - k _r	0.15



NTN DRIVESHAFT ANDERSON, INC.

Category	Cylindrical Roller Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.154
EAN	7316577028990
Product Group	B04144
Bore Profile	Straight
Cage Material	Polymer
Precision Class	RBEC 1 ISO P0
Number of Rows of Rollers	Single Row
Separable	Inner Ring - Both Sides
Rolling Element	Cylindrical Roller Bearing
Profile	Complete with Outer and Inner Ring
Snap Ring	No
Internal Clearance	C0-Medium
Retainer	Yes
Relubricatable	Yes
Inch - Metric	Metric
Other Features	High Capacity Plain Inner Ring 2 Rib Outer Ring Cage on Outer Ring ID
Long Description	20MM Bore; Straight Bore Profile; 52MM Outside Diameter; 15MM Width; Polymer Cage Material; RBEC 1 ISO P0; Single Row; Inner Ring - Both Sides Separable; No Snap Ring; Relubricatable; C0-Medium Int
Category	Cylindrical Roller Bearing
UNSPSC	31171547
Harmonized Tariff Code	8482.50.00.00
Noun	Bearing



NTN DRIVESHAFT ANDERSON, INC.

Manufacturer URL	http://www.skf.com
Manufacturer Item Number	NU 304 ECP
Weight / LBS	0.34
Bore	0.787 Inch 20 Millimeter
Outside Diameter	2.047 Inch 52 Millimeter
Width	0.591 Inch 15 Millimeter
bore diameter:	20 mm
precision rating:	RBEC 1 (ISO Class Normal)
outside diameter:	52 mm
maximum rpm:	18000 RPM
overall width:	15 mm
bearing material:	Steel
flanges:	(2) Outer Ring
cage material:	Polyamide
bore type:	Straight
finish/coating:	Uncoated
number of rows:	1
closure type:	Open
internal clearance:	C0
application:	Piston Type Machines, Rolling Mills, Spindles/Machine Tools
ring separation:	Separable Ring
outer ring width:	15 mm
operating temperature range:	Maximum of +300 ° F
fillet radius:	1 mm
dynamic load capacity:	35.5 kN
series:	NU3
static load capacity:	26 kN
D ₁	41.85 mm
r _{1,2} min.	1.1 mm



NTN DRIVESHAFT ANDERSON, INC.

$r_{3,4}$ min.	0.6 mm
s max.	0.9 mm
d_a min.	24.1 mm
d_a max.	26.2 mm
d_b min.	29 mm
D_a max.	45.4 mm
r_a max.	1 mm
r_b max.	0.6 mm
Basic dynamic load rating C	35.5 kN
Basic static load rating C_0	26 kN
Fatigue load limit P_u	3.25 kN
Calculation factor k_r	0.15
Limiting value e	0.2
Axial load factor Y	0.6
Mass bearing	0.14 kg